

FEATURES

- Field-Bus remote data acquisition
- Modbus Slave device on RS-485
- Modbus RTU Protocol
- 1 Universal Analogue Input + 1 Analogue Input V/mA
- 2 Analogue Outputs 0-20mA
- 3 Digital Inputs
- 1 SSR Digital Output + 2 SPST Relay Outputs
- Watch-Dog Alarm
- Remotely Configurable
- 1500 Vac galvanic isolation on all the ways
- High Accuracy
- UL / CE mark
- DIN rail mounting in compliance with EN-50022



GENERAL DESCRIPTION

The DAT 3011 device is able to acquire RTD or Tc sensors, mV, V or mA input signals connected to the universal analogue input in engineering units in digital format. Moreover it is available a second isolated analogue input for V or mA. The device is able to acquire up to 3 digital inputs and to drive one solid-state relay and two SPST relays. The Data are transmitted with MODBUS RTU protocol on the RS-485 network.

The device guarantees high accuracy and a stable measure versus time and temperature. To ensure the plant safety two Watch-Dog timer alarms are provided.

The isolation between the parts of circuit removes eventual ground-loop effects, allowing the use of the device even in the heavy environmental conditions.

The DAT 3011 is in compliance with the Directive UL 61010-1 for US market and with the Directive CSA C22.2 No 61010-1 for the Canadian market.

The device is housed in a rough self-extinguishing plastic container which, thanks to its thin profile of 22.5mm only, allows a high density mounting on EN-50022 standard DIN rail.

USER INSTRUCTIONS

Before to install the device, please read the "Installation Instruction" section.

If the module configuration is unknown, with device powered off, connect the INIT terminal to the GND terminal (ground), at the next power on the device will be auto-configured in the default settings (refer to the User Guide of the device).

Connect power supply, serial bus, analogue and digital inputs and outputs as shown in the "Wiring" section.

When the device is powered, the green LED "PWR" is fixed in ON condition, the yellow LED "STS" changes state and depends on the working condition of the device: refer to the "Light Signalling" section to verify the device working state.

To perform configuration and calibration operations, read the instructions in the User Guide of the device.


To simplify handling or replacing of the device, it is possible to remove the wired terminals even with the device powered.

TECHNICAL SPECIFICATIONS (Typical @ 25 °C and in the nominal conditions)


INPUT			Input Impedance			POWER SUPPLY		
Input type	Min	Max	mV, TC	10 MΩ	Power supply voltage	18 .. 30 Vdc		
Voltage			Volt	1 MΩ	Reverse polarity protection	60 Vdc max		
100 mV	-100 mV	100 mV	mA	22 Ω	Current consumption	100 mA max.		
10 Volt	-10 V	10 V	Thermal Drift (1)					
TC			Inputs - Full Scale	± 0.01 % / °C				
J	-210°C	1200°C	Thermal Drift CJC					
K	-210°C	1370°C	Full Scale	± 0.02 °C / °C				
R	-50°C	1760°C	Sample time	1 sec.				
S	-50°C	1760°C	Warm-up time	3 minutes				
B	400°C	1825°C	OUTPUT (2 channels)					
E	-210°C	1000°C	Output type	Min	Max	ISOLATION		
T	-210°C	400°C	Current	0 mA	20 mA	(Power supply - RS485 – Universal input – V		
N	-210°C	1300°C	Accuracy (2)			mA Input – Digital Inputs – Analogue Outputs)		
RTD 2,3 wires			± 0.05 % f.s.			1500 Vac,		
Pt100	-200°C	850°C	Linearity (2)			50 Hz, 1 min		
Pt1000	-200°C	200°C	± 0.05 % f.s.			ENVIRONMENTAL CONDITIONS		
Ni100	-60°C	180°C	Thermal Drift (2)			Operative Temperature		
Ni1000	-60°C	150°C	± 0.01 % / °C			-10°C .. +60°C		
Resistance 2,3 wires			Load resistance			UL Operative Temperature		
Low	0 Ω	500 Ω	< 500 Ohm			-10°C .. +40°C		
High	0 Ω	2000 Ω	Auxiliary Voltage			Storage Temperature		
Potentiometer			> 12V @ 20 mA			-40°C .. +85°C		
	20 Ω	2000 Ω	Data Transmission			Humidity (not condensed)		
Current			Baud Rate			0 .. 90 %		
20 mA	-20 mA	20 mA	115.2 Kbps			Maximum Altitude		
Accuracy (1)			Max. distance			2000 m		
mV, Volt, mA	± 0.05 % f.s.		DIGITAL INPUTS			Installation		
Pot, RTD, Res.	± 0.05 % f.s.		Number of Channels			Indoor		
TC	> ± 0.05 % f.s. or 5 uV		3			Category of installation		
Linearity (1)			Input voltage			II		
mV, Volt, mA	± 0.05 % f.s.		OFF State : 0÷3 V			Pollution Degree		
Pot, RTD, Res.	± 0.1 % f.s.		(bipolar)			2		
TC	± 0.2 % f.s.		ON State : 10÷30 V			MECHANICAL SPECIFICATIONS		
RTD, Res, Pot excitation current			Input Impedance			Material		
Typical	0.700 mA		4.7 KOhm			Self-extinguish plastic		
Lead wire resistance influence			DIGITAL OUTPUTS			IP Code		
RTD/Res 3 wires(50 Ω max balanced)	0.05 f.s. %/Ω		N.1 SSR Output			IP20		
mV, Tc	< 0.8 uV/Ohm		Voltage			Wiring		
CJC Compensation error	± 1°C		30 Vac / 48 Vdc			wires with diameter		
(1) Referred to input Span (difference between max. and min. values)			Current (resistive load)			0.8±2.1 mm ² /AWG 14-18		
(2) Referred to output Span (difference between max. and min. values)			0.4 A max			Tightening Torque		
			N.2 Relays SPST			0.5 N m		
			Maximum switching power per contact (resistive load)			Mounting		
			2 A @ 250 Vac			in compliance with DIN		
			2 A @ 30 Vdc			rail standard EN-50022		
			5Vdc, 10mA			about 150 g.		
			Maximum load			CERTIFICATIONS		
			250Vac (50 / 60 Hz) ,			EMC (for industrial environments)		
			110Vdc			Immunity		
			Dielectric Strength between contacts			EN 61000-6-2		
			1000 Vac, 50 Hz, 1 min.			Emission		
			Dielectric Strength between coil and contacts			EN 61000-6-4		
			4000 Vac, 50 Hz, 1 min.			UL		
						US Standard		
						UL 61010-1		
						Canadian Standard		
						CSA C22.2 No		
						61010-1		
						CCN		
						NRAQ/NRAQ7		
						Typology		
						Open Type device		
						Industrial Control		
						Equipment		
						E352854		

WIRING


ANALOG INPUT 0 - UNIVERSAL

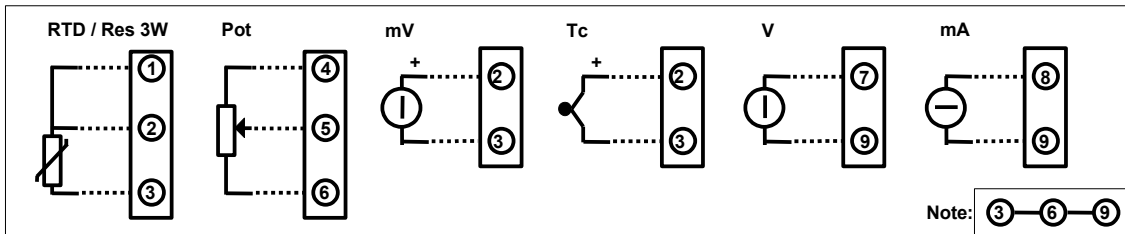


ANALOG INPUT 1 - V / mA

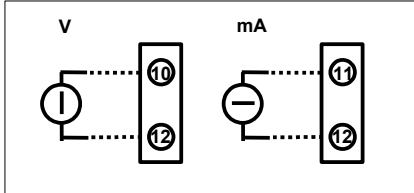


RS-485




POWER SUPPLY (*)



INIT




DIGITAL OUTPUTS

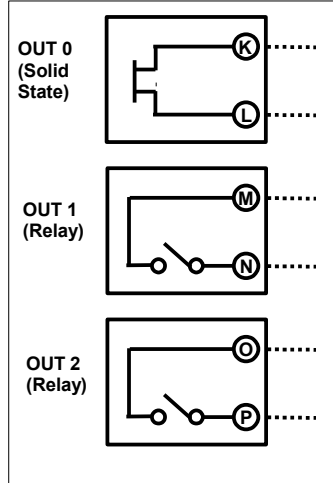


(*) Note: for UL installation the device must be powered using a power supply unit classified NEC class 2 or SELV

ANALOG OUTPUTS - mA

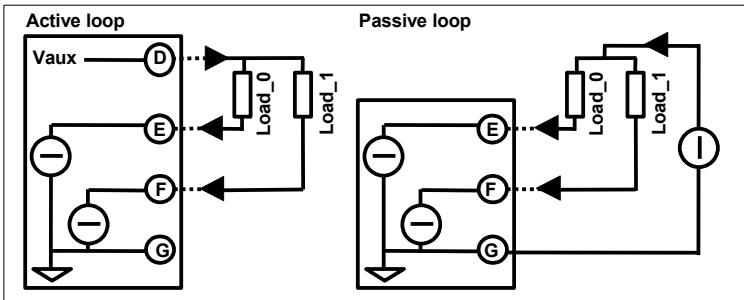

DIGITAL INPUTS



ISOLATIONS

1 UNIVERSAL ANALOG INPUT	RS485 LINE
1 V / mA INPUT	2 ANALOGUE OUTPUTS
3 DIGITAL INPUTS	SUPPLY
	1 SOLID STATE RELAY
	2 SPST RELAYS

INSTALLATION INSTRUCTIONS

The device is suitable for fitting to DIN rails in the vertical position. For optimum operation and long life follow these instructions:

When the devices are installed side by side it may be necessary to separate them by at least 5 mm in the following case:

- If panel temperature exceeds 45°C and at least one of the overload conditions exist.

Make sure that sufficient air flow is provided for the device avoiding to place raceways or other objects which could obstruct the ventilation slits. Moreover it is suggested to avoid that devices are mounted above appliances generating heat; their ideal place should be in the lower part of the panel. Install the device in a place without vibrations.

Moreover it is suggested to avoid routing conductors near power signal cables (motors, induction ovens, inverters etc...) and to use shielded cable for connecting signals.

LIGHT SIGNALLING

LED	COLOR	STATE	DESCRIPTION
PWR	GREEN	ON	Device powered
		OFF	Device not powered
STS	YELLOW	ON	System Error
		OFF	Correct working
RX	RED	BLINK	Data receiving from RS-485
		OFF	No Data receiving
TX	RED	BLINK	Data Transmission on RS-485
		OFF	No Data Transmission
I(n)	RED	ON	Digital Input 'n': ON State
		OFF	Digital Input 'n': OFF State
Q(n)	RED	ON	Digital Output 'n': ON State
		OFF	Digital Input 'n': OFF State

MODBUS REGISTERS MAPPING


Register	Description	Access
40001	--Reserved--	R/W
40002	Firmware [0]	R
40003	Firmware [1]	R
40004	Name [0]	R/W
40005	Name [1]	R/W
40006	--Reserved--	R/W
40007	Node ID	R/W
40008	--Reserved--	R/W
40009	Digital Inputs	R/W
40010	Digital Outputs	R/W
40011	System Flags	R/W
40012	--Reserved--	-

40018		
40019	COM Settings	R/W
40020	--Reserved--	-

40026		
40027	Analogue In 0	R
40028	Analogue In 1	R
40029	--Reserved--	-

40032		
40033	Analogue Out 0	R/W
40034	Analogue Out 1	R/W

MECHANICAL DIMENSIONS (mm)

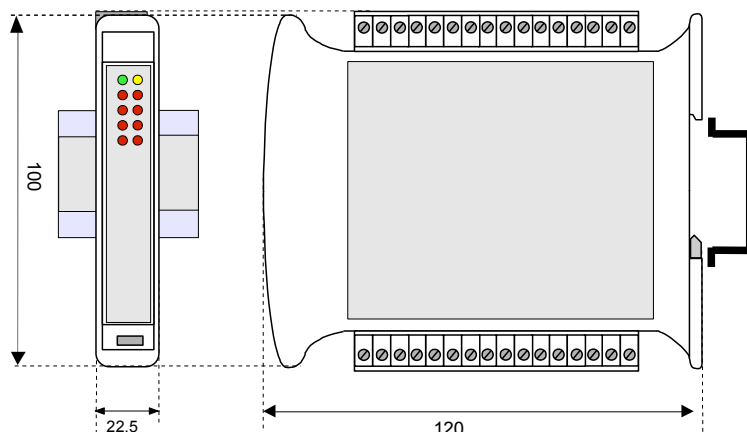

HOW TO ORDER

DAT3011 can be supplied with the configuration specified by the customer.

ORDER CODE:

DAT 3011 / Pt100 / 20 mA

Input type channel 1

Input type channel 2

■ = Requested
□ = Optional